

B10 Series (SMA Male-ST to SMA Male-ST)

High Performance Cable Assembly, 50ohms, DC-18GHz



B10-01-01-"L" (L: Length)

Maximum Ratings

Operating Temperature -55°C to +85°C


Storage Temperature -55°C to +85°C

Permanent damage may occur if any of these limits are exceeded


Cable Diameter	7.37mm
Velocity of Propagation	84%
Shielding Effectiveness	>90dB
Power Handling at 40°C	1 GHz 590W
	2 GHz 414W
	6 GHz 221W
	12GHz 172W
	16 GHz 165W
	18 GHz 153W
Min. Bending Radius	1.5" (38.1mm)

Outline Drawing

Unit [mm]



Cable Cross Section

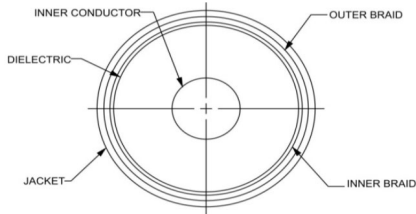

Cable Construction	
Inner Conductor	Solid Silver Plated Copper
Dielectric	LD-PTFE
Inner Braid	Silver-Plated Copper Strip
Outer Braid	Silver-Plated Copper Braid
Jacket	FEP
Connectors	
• Nut, Stainless steel, Passivated	
• Body, Stainless steel, Passivated	
• Center contacts, Brass, Gold plated	
• Dielectric, PTFE, Natural	

Product Guarantee*

Micable will repair or replace your cable assembly if it fails within six months after shipment. This guarantee excludes product damage from misuse or abuse

Features

- Stainless steel connectors for long mating-cycle life
- High shielding effectiveness, >90dB
- Excellent phase stability over temperature, 500ppm@-55°C~+85°C
- Extremely low loss, low VSWR
- High power handling

Applications

- Phase array radars
- High-power transmitter
- Rack to rack connection
- RF/Microwave test systems
- Airborne, shipborne and ground systems

Electrical Specifications at 25°C

Freq. (GHz)	Length (m)	Insertion Loss (dB@GHz)								VSWR (@GHz)							
		DC - 2.5		2.5-6		6-12		12-18		DC - 2.5		2.5-6		6-12		12-18	
		Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.
DC-18	0.5	0.3	0.4	0.4	0.5	0.5	0.6	0.6	0.7	1.09	1.15	1.12	1.20	1.18	1.25	1.25	1.30
	1	0.4	0.5	0.6	0.7	0.8	0.9	1.0	1.1								
	1.5	0.6	0.7	0.8	0.9	1.1	1.2	1.3	1.4								
	2	0.7	0.8	1.0	1.1	1.4	1.5	1.5	1.7								

Typical Performance Data (B10-01-01-1M)

Frequency(MHz)	VSWR	Insertion Loss (dB)
50	1.02	0.04
1000	1.07	0.22
2000	1.08	0.33
2500	1.09	0.38
4000	1.10	0.46
5000	1.11	0.51
6000	1.12	0.57
7000	1.13	0.61
8000	1.14	0.66
9000	1.15	0.70
10000	1.16	0.73
12000	1.18	0.81
13000	1.19	0.86
15000	1.22	0.93
18000	1.25	1.00

