

C25F Series (SMP Female-RA to SMP Female-RA)

Low Loss .047 Cable Assembly, 50ohms, DC-26.5GHz



C25F-38-38-"L" (L: Length)

Maximum Ratings

Operating Temperature -55°C to +125°C


Storage Temperature -55°C to +125°C

Permanent damage may occur if any of these limits are exceeded


Cable Diameter		1.42mm
Velocity of Propagation		70%
Shielding Effectiveness		>100dB
Power Handling at 20°C	1 GHz	49W
	6 GHz	19W
	12 GHz	13W
	18 GHz	11W
	26.5 GHz	8W
Min. Bending Radius		3mm

Outline Drawing

Unit[mm]



Cable Cross Section

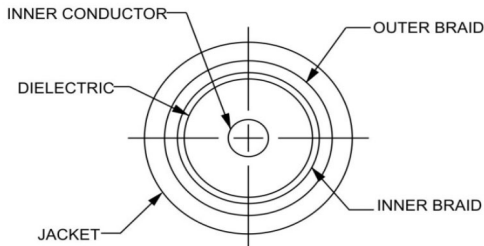

Features

- Super flexible with minimum bend radius of 3 mm
 - Very low loss with 6.129dB/m @ 26.5GHz
 - Low return loss with 16dB @ 26.5GHz
 - Excellent shielding effectiveness >100 dB
 - Excellent phase stability vs temperature 400ppm@-40~+70°C
 - Ideal for application of compact installation space
 - Very stable performance during bending and shaking
 - Amplitude Stability: <±0.08dB@26.5GHz
 - Phase Stability vs. Flexure: ±2.7°@26.5GHz
- (When wrapped 360° around a 14.2mm radius mandrel)

Applications



- In-box and board to board connection
- High-density integrated connection
- High accuracy miniature delay line
- 5G Massive MIMO and antenna OTA test
- Military and commercial miniature systems

Electrical Specifications at 25°C

Freq. (GHz)	Length (m)	Insertion Loss (dB@GHz)								VSWR (@GHz)							
		DC.-6		6-12		12-18		18-26.5		DC.-6		6-12		12-18		18-26.5	
		Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.
DC- 26.5	0.2	0.7	0.8	0.9	1.1	1.2	1.4	1.5	1.7	1.15	1.20	1.26	1.30	1.31	1.35	1.38	1.45
	0.3	1.0	1.1	1.3	1.5	1.7	1.9	2.1	2.3								
	0.5	1.6	1.7	2.1	2.3	2.7	2.9	3.4	3.6								

Typical Performance Data (C25F-38-38-0.2M)

Frequency(MHz)	VSWR	Insertion Loss (dB)
50	1.02	0.08
1000	1.04	0.22
2000	1.06	0.36
3000	1.09	0.49
4000	1.07	0.55
5000	1.10	0.61
6000	1.15	0.68
7000	1.11	0.75
8000	1.12	0.79
9000	1.17	0.86
10000	1.12	0.91
12000	1.26	0.96
13000	1.22	1.01
15000	1.16	1.07
18000	1.31	1.17
26500	1.38	1.43

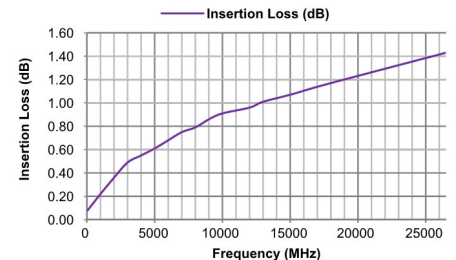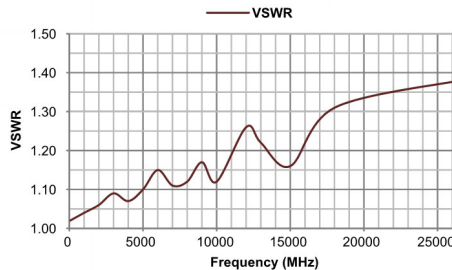

Product Guarantee*

Micable will repair or replace your cable assembly if it fails within six months after shipment. This guarantee excludes product damage from misuse or abuse