


Revision	Description	ECN No.	Date
A	Initial Release	N/A	2020-02-20

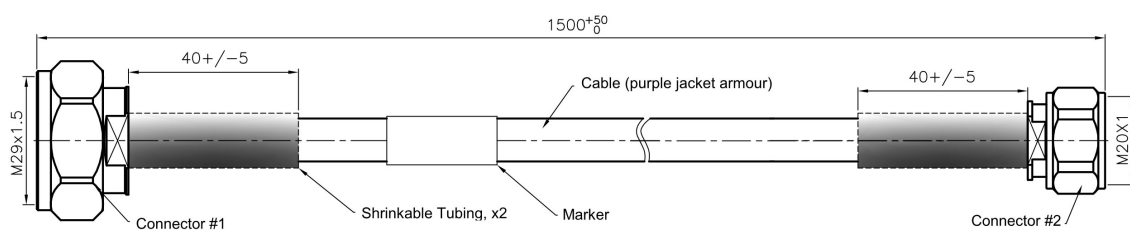

Specifications

1. ELECTRICAL

- 1.1 Impedance: 50Ω
- 1.2 Frequency Range: DC-6GHz
- 1.3 Dielectric Withstanding Voltage: 1000V
- 1.4 Insulation Resistance: 5000MΩ
- 1.5 Insertion Loss: 2.2dB@6GHz max.
- 1.6 VSWR: 1.25:1@6GHz max
- 1.7 PIM: -165dBc max, tested at 1805-1880MHz frequency

2. MECHANICAL

- 2.1 Min. Bending Radius: 50mm
- 2.2 Durability: 500 cycles min.

3. MATERIAL

- 3.1 Cable: IME02, Flexible Cable with Armor Φ10mm
 - 3.2 Connector #1: L29 Male
 - 3.2.1 Contact: Brass, Silver
 - 3.2.2 Insulator: PTFE
 - 3.2.3 Body: Brass, CuSnZn
 - 3.2.4 Coupling Nut: Brass, CuSnZn
 - 3.3 Connector #2: 4.3-10 Male
 - 3.3.1 Contact: Brass, Silver
 - 3.3.2 Insulator: PTFE
 - 3.3.3 Body: Brass, CuSnZn
 - 3.3.4 Coupling Nut: Brass, CuSnZn
 - 3.4 Shrinkable Tubing: Black, EVA, Φ12.7mm
 - 3.5 Marker: White, EVA, Φ12.7mm
- Content:
- Line 1: IME02-49-1H-1.5M/VA3
- Line 2: MICABLE YYMMXXXX (XXXX: Serial Number)

4. ENVIRONMENTAL

- 4.1 2011/65/EU RoHS: Compliant
- 4.2 Temperature Range: -40°C~+85°C

CUSTOMER OUTLINE DRAWING

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN MILLIMETERS.
AND TOLERANCES ARE:

DECIMALS: LENGTH:
X: ±0.2 L<1M: 0/+5mm
X.X: ±0.1 L≥1M: 0/+1%
X.XX: ±0.05

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
MICABLE AND SHALL NOT BE REPRODUCED
OR TRANSFERRED TO OTHER DOCUMENTS OR
DISCLOSED TO OTHERS OR USED FOR ANY
PURPOSE OTHER THAN THAT WHICH IT WAS
OBTAINED WITHOUT THE EXPRESSED WRITTEN
CONSENT OF MICABLE

MiCable

DRAWN: CZB DATE: 2020-02-20
REVIEWED: DATE:
APPROVED: DATE:
REFERENCE:
FILE PATH:

DESCRIPTION: IME02 CABLE ASSEMBLY, L29 MALE
TO 4.3-10 MALE, 50 OHMS
DWG. NO.
IME02-49-1H-1.5M/VA3

SCALE: NTS SHEET 1 OF 1