

## Bi-Directional Coupling Detector

### Model - SA-06-03

Rev. - A

Bi-Directional Detector. It can measure, detect and output the forward/reverse power data of the load under test.




Electrical & Mechanical Specifications

- Frequency Range: 2-6GHz;
- Forward detection voltage:  $1.2 \pm 0.2V$  (100W CW);
- Detection voltage flatness:  $\leq 15\%$ ;
- Temperature change rate:  $\leq \pm 2.5\%$  (-50~+55°C);
- Main Line VSWR:  $\leq 1.3$ ;
- Insertion Loss:  $\leq 0.5dB$ ;
- Coupling:  $\leq 37 \pm 1dB$ ;
- Directivity:  $\geq 12dB$ ;
- CW Power: 200W;
- Dimension: 91.4x40x20mm;
- Connector Type: TYPE N[F], I.A.W. IEC 61169;
- Surface Coating: Nickel plating, I.A.W ISO 4527;

Note3- Unit: mm , Unless otherwise specified, .x  $\pm 1.0$  .xx  $\pm 0.50$  Holes:  $\pm 0.3$  All specifications are subject to change without notice at any time

2D Outline Drawing

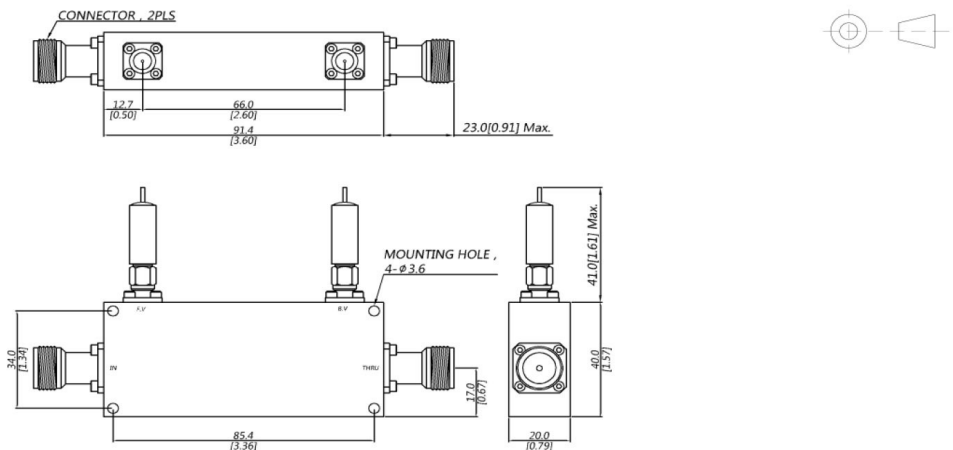

Fujian MiCable Electronic Technology Group Co.,Ltd

[www.micable.cn](http://www.micable.cn)

+86 400-918-0388

[sales@micable.cn](mailto:sales@micable.cn)