

T26 Series (SMA Male-ST to SMA Fmeale-ST)

High Reliable & Durable Precision Test Cable Assembly, 50ohms, DC-26.5GHz



T26-01-02"L" (L: Length)

Maximum Ratings

Operating Temperature 23°C± 5°C


Storage Temperature -55°C to +85°C

Permanent damage may occur if any of these limits are exceeded


Cable Diameter		5.20mm
Velocity of Propagation		76%
Shielding Effectiveness		>90dB
Power Handling at 40°C	1 GHz	149W
	2 GHz	102W
	6GHz	56W
	12 GHz	38W
	18 GHz	30W
	26.5 GHz	24W
Min. Bending Radius		25mm

Outline Drawing

Unit [mm]



Cable Cross Section

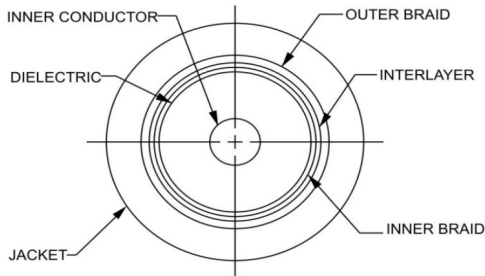

Cable Construction	
Inner Conductor	-
Dielectric	-
Inner Braid	-
Interlayer	-
Outer Braid	-
Jacket	PUR

Connectors

- Nut, Stainless steel, Passivated
- Body, Stainless steel, Passivated
- Center contacts, Brass Copper, Gold plated
- Dielectric, PEI, Natural

Product Guarantee*

Micable will repair or replace your cable assembly if it fails within six months after shipment. This guarantee excludes product damage from misuse or abuse

Features

- Super flexible & durable
- Qualified for over 150K flex cycles
- Outstanding VSWR performance, 1.25@26.5GHz typ.
- Negligible change of phase & amplitude over flexure, shaking & torsion

Applications

- Lab and production line test
- 5G Massive MIMO and antenna OTA test
- 5G switch and attenuator matrices systems
- Phase array test systems
- RF/Microwave test systems

Electrical Specifications at 25°C

Freq. (GHz)	Length	Insertion Loss (dB@GHz)								VSWR (@GHz)							
		DC - 2.5		2.5-6		6-18		18-26.5		DC - 2.5		2.5-6		6-18		18-26.5	
		Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.
DC-26.5	2FT	0.6	0.7	0.7	0.9	1.6	1.8	2.0	2.2	1.06	1.12	1.08	1.15	1.20	1.25	1.26	1.30
	1M	1.0	1.1	1.2	1.4	2.3	2.5	2.9	3.1								

Typical Performance Data (T26-01-02-1M)

Frequency(MHz)	VSWR	Insertion Loss (dB)
50	1.02	0.10
1000	1.04	0.46
2000	1.05	0.67
4000	1.06	0.98
5000	1.07	1.11
6000	1.08	1.23
7000	1.09	1.34
8000	1.10	1.45
9000	1.11	1.55
10000	1.12	1.64
12000	1.14	1.83
13000	1.15	1.91
15000	1.17	2.08
18000	1.20	2.32
26500	1.26	2.93

