

A04I Series (TNC Male-ST to TNC Male-ST)

LL335I, Cable Assembly, 50ohms, DC-18GHz



A04I-11-11-"L" (L: Length)

Maximum Ratings

Operating Temperature -55°C to +85°C


Storage Temperature -55°C to +85°C

Permanent damage may occur if any of these limits are exceeded


Cable Diameter	7.65mm	
Velocity of Propagation	83%	
Shielding Effectiveness	>95dB	
Power Handling at 20°C	1 GHz	595W
	2 GHz	421W
	6 GHz	232W
	12GHz	182W
	16 GHz	175W
	18 GHz	163W
Min. Bending Radius	1.5" (38.1mm)	

Outline Drawing

Unit [mm]



Cable Cross Section

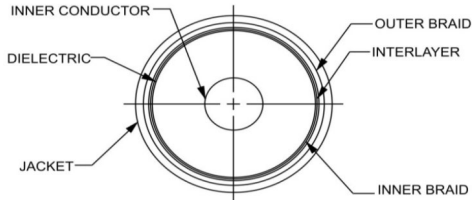

Cable Construction	
Inner Conductor	Solid Silver Plated Copper
Dielectric	Expanded PTFE Tape
Inner Braid	Silver-Plated Copper Strip
Interlayer	Aluminum Polyester
Outer Braid	Silver-Plated Copper Braid
Jacket	FEP

Connectors

- Nut, Stainless steel, Passivated
- Body, Stainless steel, Passivated
- Center contacts, Brass, Gold plated
- Dielectric, PTFE, Natural

Product Guarantee*

Micable will repair or replace your cable assembly if it fails within six months after shipment. This guarantee excludes product damage from misuse or abuse

Features

- Frequency up to 18 GHz
- Stainless steel connectors for long mating-cycle life
- Triple shielded cable for excellent shielding effectiveness, >95dB
- Excellent phase stability over temperature, 220ppm@+22°C~+85°C
- Low loss, low VSWR
- High power handling

Applications

- Rack to rack connection
- RF/Microwave test systems
- Airborne, shipborne and ground systems
- Phase array radars
- High power transmitters
- Power amplifier systems

Electrical Specifications at 25°C

Freq. (GHz)	Length (m)	Insertion Loss (dB@GHz)								VSWR (@GHz)							
		DC - 2.5		2.5-6		6-12		12-18		DC - 2.5		2.5-6		6-12		12-18	
		Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.
DC-18	0.5	0.3	0.4	0.4	0.5	0.5	0.7	0.6	0.8	1.09	1.15	1.12	1.20	1.18	1.25	1.30	1.35
	1	0.4	0.5	0.6	0.7	0.8	1.0	1.0	1.2								
	1.5	0.6	0.7	0.8	0.9	1.1	1.3	1.4	1.6								
	2	0.7	0.8	1.0	1.1	1.4	1.6	1.8	2.0								

Typical Performance Data (A04I-11-11-1M)

Frequency(MHz)	VSWR	Insertion Loss (dB)
50	1.02	0.03
1000	1.07	0.27
2000	1.08	0.33
2500	1.09	0.38
4000	1.10	0.46
5000	1.11	0.51
6000	1.12	0.56
7000	1.13	0.60
8000	1.14	0.65
9000	1.15	0.69
10000	1.16	0.73
12000	1.18	0.81
13000	1.19	0.87
15000	1.22	0.96
18000	1.30	1.06

